



For installation on Windows 7:


- 1) Unzip the files to a temporary directory (C:\Temp\cskdriverswin7\)
- 2) Plug the CSK Dev Board into the computer. Windows will try to automatically install the device drivers, and there will be pop-up messages indicating "Device driver software was not successfully installed". These messages can be ignored.
- 3) Open the Device Manager (<http://www.techtalkz.com/windows-7/515982-how-use-device-manager-windows-7-a.html>)
  - a. Click the Start button to view the Start Menu and then choose the Control Panel option.

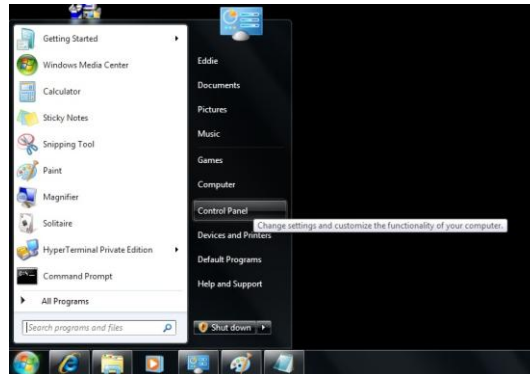


- b. The Control Panel window opens up. Now click the System and Security link from this window.

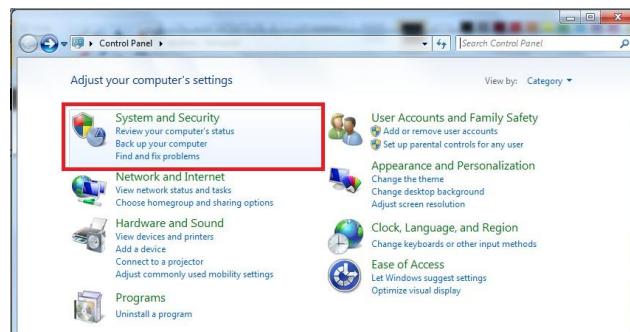

- c. The System and Security section of Control Panel opens up and you can see the direct link for the Device Manager.
  - d. Click on Device Manager and the window opens up.

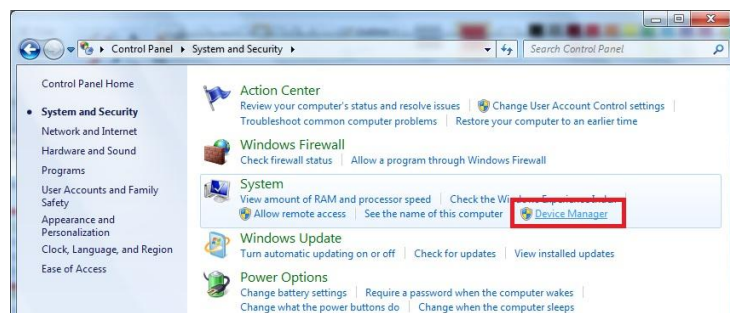


- 4) Right click on "CubeSat Kit /XXXX" (Under "Other Devices", XXXX represents a set of 4 digits) and choose "Update Driver Software"

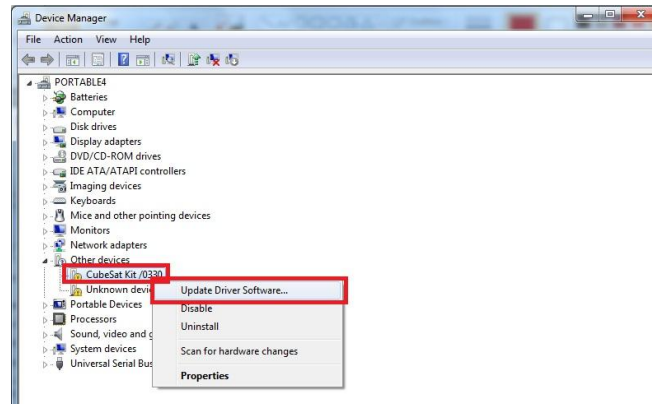


- 5) Choose the option " Browse my computer for driver software"




- 6) In the location field, input the temporary directory that the files were unzipped to (C:\Temp\cskdriverswin7)

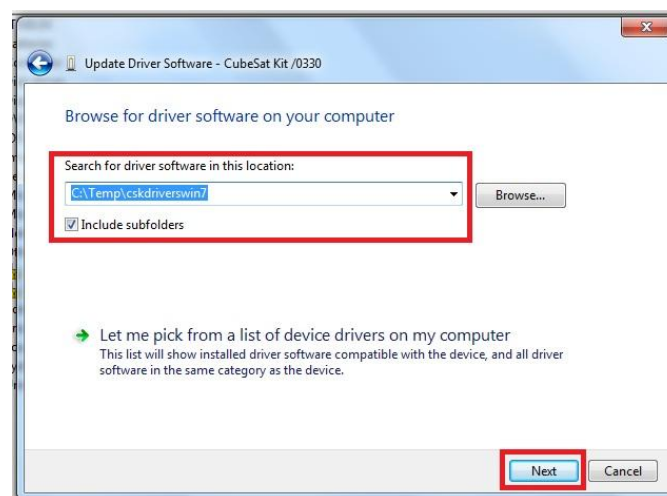

- 7) Choose "Install this driver software anyway" when the Windows Security warning pops up.

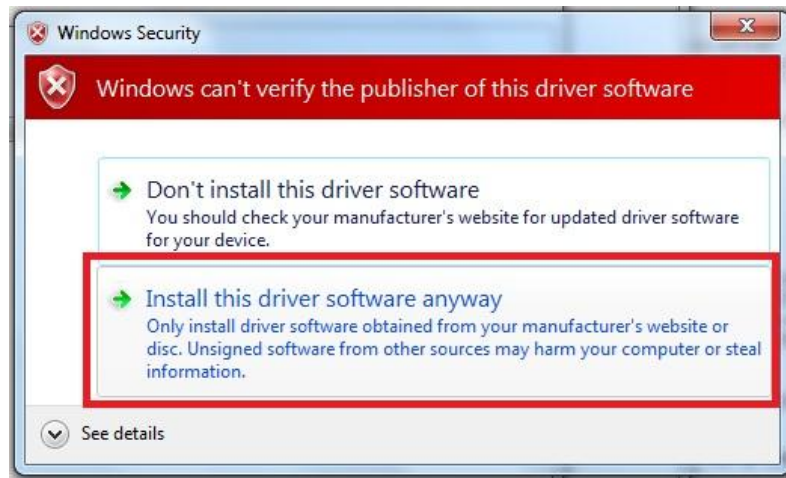

- 8) The driver for the CubeSat Kit USB Interface will now install. Click on "Close" once installation is complete.

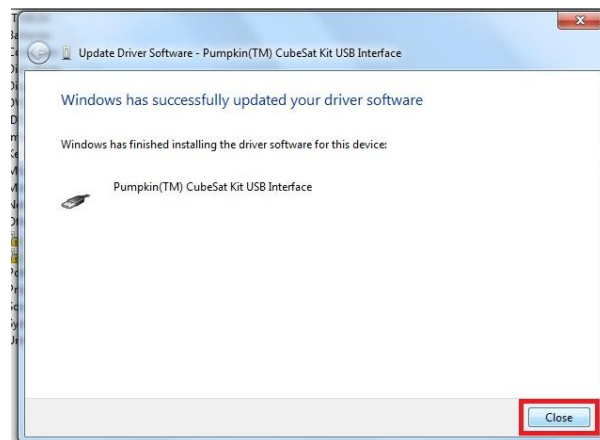

- 9) You will need to repeat steps 4) through 8) again, this time choosing "USB Serial Port" in the Device Manager.

